

# 13A Multi Use Touch Activated Timer Switch

Please read the instructions fully before attempting installation.

## IMPORTANT

This unit should be installed to current IEE wiring regulations.

- This switch provides a general purpose time control.
- Applications to include lighting, heating and ventilation.
- This timer can be used independently or as a master unit when using slave trigger switches.

## Operation

Select the desired time delay range and the mode of operation by switching the DIL (dual in line) switches.

Once the range and mode has been set finer adjustments of the timing can be made using the thumbwheel.

Turn the thumbwheel clockwise will increase the time delay


**DIL Switch Settings** (Note: white squares indicates switch position)

### On/off Mode:

Operating the timer will start the timing sequence.

Operating the timer will stop the sequence immediately.


This mode of operation will override the other two modes



### Resetting Mode:

Operating the timer will start the timer sequence


Operating the timer again during operation will restart the timing



### Non-resetting Mode:

Operating the timer will start the timing sequence.

Operating the timer again during operation will have no effect.



## Wiring

For standard operation see Fig. 1

When replacing a 3-wire staircase lighting system see Fig. 2 using non-resetting mode of this application

The external slave trigger is optional.

Neutral is required




Figure 1: Standard Wiring





Figure 2: 3-Wire System

**Note:** When the power is switched on for the first time a period of 10 seconds must be allowed before operating the timer.

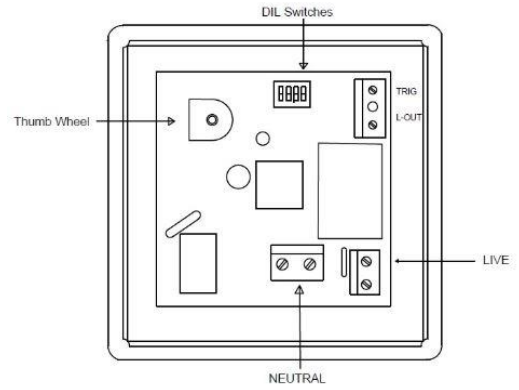

Any electrical work should be carried out by a qualified electrician – warranty is only valid if installed by UK qualified electrician. You may be required to supply copies of electrician’s certificate in the event of a warranty claim.

## Technical Data

Rated at	240V AC
Resistive Load	13A
Incandescent	13A
Fluorescent/LED	6A
Heating/Electric	3000W MAX
Compact Fluorescent	6A
Time Delay	1 Second to 2 Hours - Adjustable
IP Rating	IP20

## Guarantee

This 13A Multi Use Touch Activated Timer Switch is guaranteed for a period of 12 months from date of purchase.

Please retain for future reference

Lowenergie is a registered Trademark