

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Kingfisher International Products B.V.

Supplier's address: Product quality, Kingfisher International Products B.V. Rapenburgerstraat 175E
1011 VM Amsterdam The Netherlands

Model identifier: 3663602761273

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Terminal block, 220-240V~ 50/60Hz		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80

Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Height	73	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	212		
	Depth	74		
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,374
Parameters for LED and OLED light sources:				
R9 colour rendering index value		0	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)		0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

1. 光源的光谱功率分布 (SPD) 曲线图
 2. 光源的光谱功率分布 (SPD) 曲线图

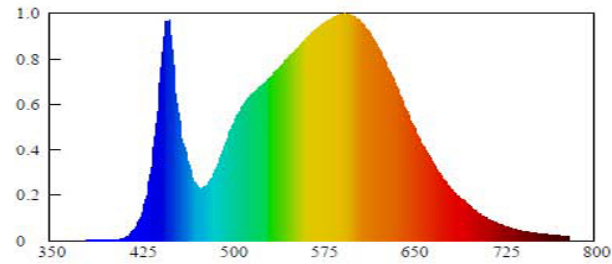

光源的光谱功率分布

光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图
光源名称	光源的光谱功率分布 (SPD) 曲线图	光源的光谱功率分布 (SPD) 曲线图

必维欧亚电气技术咨询服务 (上海) 有限公司	必维欧亚电气技术咨询服务 (上海) 有限公司	必维欧亚电气技术咨询服务 (上海) 有限公司
必维欧亚电气技术咨询服务 (上海) 有限公司		