## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Kingfisher Int. Prod. B.V.

**Supplier's address:** Product quality, Kingfisher International Products B.V. Rapenburgerstraat 175E

1011 VM Amsterdam The Netherlands

**Model identifier:** 3663602762911

Type of	light	source:
---------	-------	---------

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	connector,24Vdc		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	No


## **Product parameters**

Product parameters					
Parameter	Value	Parameter	Value		
General product parameters:					
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000		
On-mode power (P <sub>on</sub> ), expressed in W	10,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the second decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80		
Outer Height	2 500	Spectral power	See image		
dimensions Width	16	distribution in the	in last page		

without separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)	Depth	3	range 250 nm to 800 nm, at full-load		
Claim of equival	ent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
			Chromaticity coordinates (x and y)	0,389	
Parameters for LED and OLED light sources:					
R9 colour rende	ring index value	0	Survival factor	0,90	
the lumen main	tenance factor	0,96			
Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	0,00	Colour consistency in McAdam ellipses	0	
Claims that source replaces light source wit ballast of a parti	hout integrated	_(b)	If yes then replacement claim (W)	<del>-</del>	
Flicker metric (P	st LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a)'-': not applicable; (b)'-': not applicable;

## 光色参数 Spectroradiometric Parameters

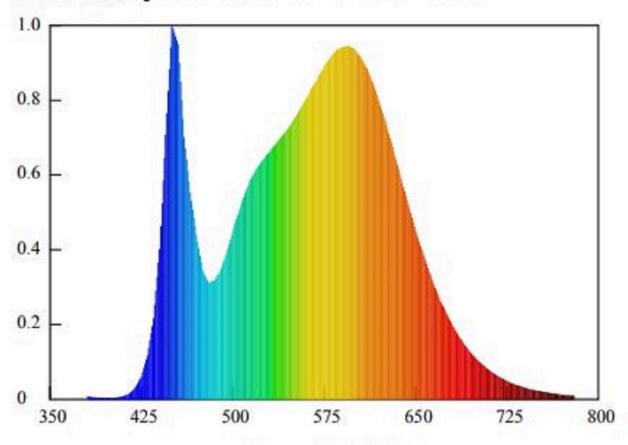

光谱分布 Spectral Distribution