


ASSEMBLY INSTRUCTIONS

Select the nylon collet size required 'D'. The tool is supplied with three sizes of collet. To change the collet, unscrew the top knurled nut 'A', completely withdraw the central metal threaded bolt and remove the collet, replacing with the required one.

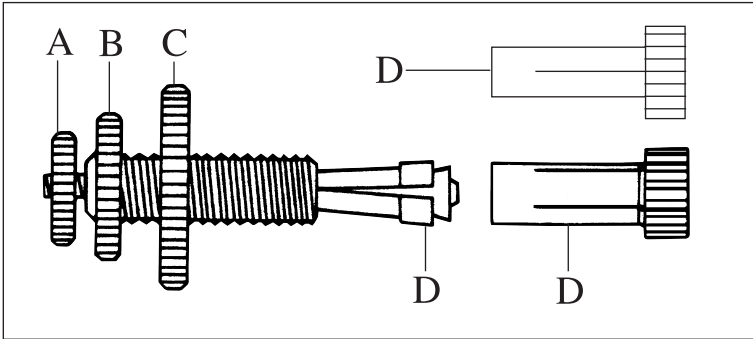

INSTRUCTIONS FOR USE

1. Place the pressure plate on top of the clutch plate (Fig. 1).
2. Fit the clutch tool into the pressure plate and clutch plate, then push nut 'B' down (Fig. 2).
3. Tighten nut 'A' (Fig. 3).
4. Do not 'C' finger tight.
5. Turn the assembled unit over, and centre/align the clutch plate onto the pressure plate. Tighten nut 'C' (Fig. 4).
The complete pre-assembled clutch and pressure plate unit can now be installed on the vehicle.

IMPORTANT: For detailed and concise instructions on the correct method of removing and replacing clutch assemblies in your vehicle always refer to the vehicle manufacturer's or Haynes workshop manuals.

