


Technical Specification Sheet

ELBE BN

4R1135

Dual lever monobloc sink mixer

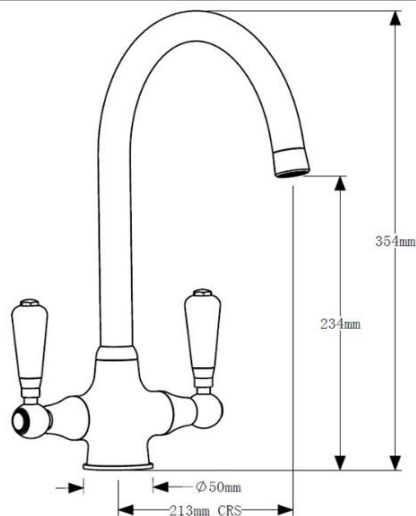

Specification

| | |
|--------------------|--|
| Finish | Brushed Nickel |
| Body | Brass |
| Fitting | Metal plate, washer, stud & locking nut |
| Connections | M12 – DN8 flexible hoses with ½" BSP threaded ends |
| Spout Rotation (°) | 360 |

Dimensions

| | |
|---------------------|----------------|
| Tap Hole Size (mm) | 35 |
| Height (mm) | 354 |
| Base Width (mm) | 50 |
| Reach (mm) | 213 |
| Weight (kg) | 1.7 |
| Box Dimensions (mm) | 410 x 245 x 60 |
| Packed Weight (kg) | 2 |

Bar Pressure

| | |
|--------------------------|-----|
| Minimum Pressure | 0.1 |
| Maximum Pressure | 6 |
| Maximum Static Pressure | 16 |
| Maximum Temperature (°C) | 60 |

Flow Rates

| @ 0.1 bar | @ 0.5 bar | @ 1 bar | @ 3 bar |
|-----------|-----------|---------|----------|
| 1.5 L/m | 7.3 L/m | 11 L/m | 20.2 L/m |

Additional Features/Benefits

- Single Flow
- Flow Straightener
- Flow Aerator
- Low Pressure

EAN number 5022050169150

Warranty

10 Year Warranty (Casting Only)

Care & Maintenance

Reginox recommends cleaning your tap regularly with non-abrasive cleaners. Warm, soapy water would be best.

All pressures are in bar.
Dimensions supplied are nominal and subject to tolerance.
Inclusion of aerator (if supplied) or restrictors (supplied separately) will affect flow rate result.
Performance details are based on trials under test conditions and are for guidance only,
The manufacturer reserves the right to change product specification without prior notice.

Certifications



1802125 - Feb 23



Tested at 0.2 bar