
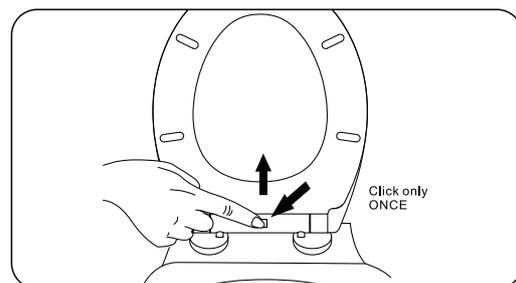
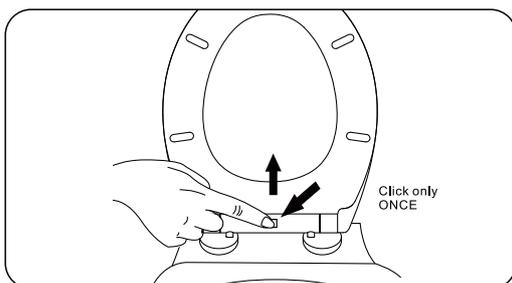
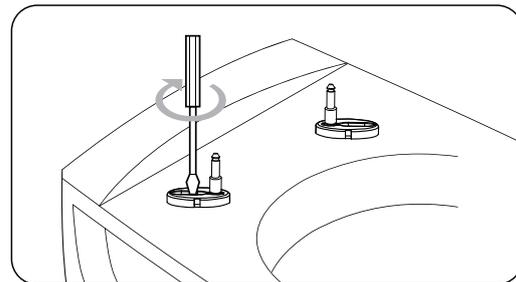
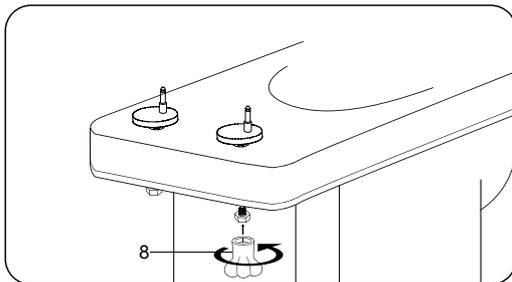
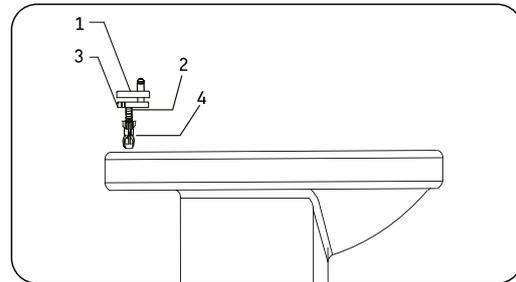
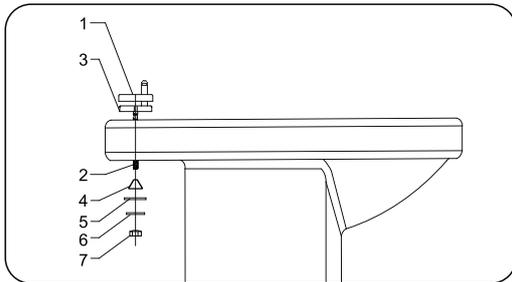
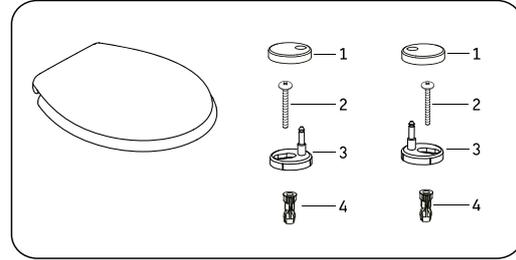


Fitting Instructions – soft close toilet seats

For conventional bottom fix toilets please use underneath bolt.

For Top fix (back to wall toilets) please use expanding gromit.

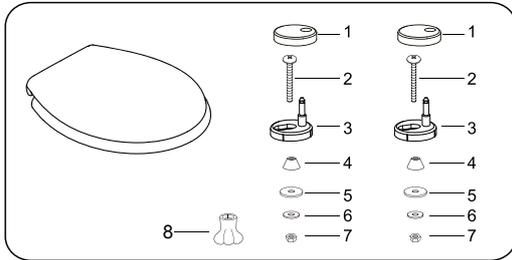

How to remove the seat



Press the button to release the seat. Lift it up. This makes it easy to clean the toilet.



The hinges are adjustable to fit most toilets.



Press down the seat to fix it firmly to the hinges.