

Congratulations on your purchase!

We sincerely hope you are satisfied with your new product. Here are a few points to help you prolong the life of your feature.

Installation Instruction

Ambienté recommends



Fountain Safe should be used all year round. This will help to reduce maintenance and to maintain the lustre of your feature by slowing or stopping the build up of algae etc.

Frost Free should be added to the feature as the colder months draw in. It lowers the freezing point of water helping to prevent frost damage. If water freezes in a fountain, it will expand and crack the feature.




All water features should be drained, dried and covered before severe frost or snow.

For pumps to function properly, they need to be completely free of air bubbles. Whilst submerged, a gentle shake or tap should be sufficient to dislodge any such bubbles.

If excessive noise is coming from the pump this could be due to either trapped air or the pump rattling against the sides of the reservoir. Please ensure the pump is "suckered" to the base of the reservoir by the rubber feet.



For regular pump maintenance

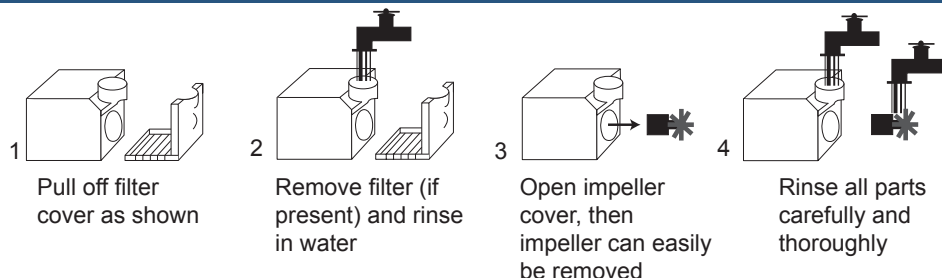

For more information:

Web: www.ambientewaterfeatures.co.uk

Address: Ambienté – Fynzi Limited, 173 Curie Avenue, Didcot, OX11 0QG

Phone number: UK: 0800 161 3832 Int: +44 (0)2087 785 612

Email: info@ambientewaterfeatures.com

Standard Three Tiered Tubes Water Feature with Lights on Base

F0712, F0713, F0714



Installation Instruction



Standard Three Tiered Tubes Water Feature With Lights on Base

Step 1

Measure the base of the reservoir and dig a hole accordingly. Place reservoir in the hole ensuring it is level.

Step 2



Attach tubing to nozzles of the multichannel adaptor. Subsequently attach this to the pump nozzle and place pump within base.

Step 3

Attach LED light cable to pump cable.

Step 4

Attach pump cable to switch and place top of feature onto base. Attach pump mains cable to switch.

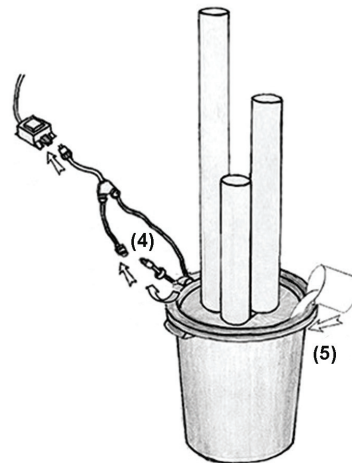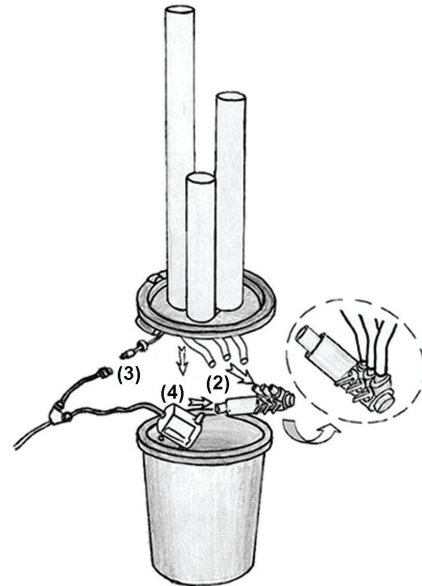

Step 5

Fill base with clean water to ensure pump is fully submerged.

Step 6

Plug in, wait until trapped air has worked its way out of the pump.

Step 7

Once water is flowing, use the 3 way adjuster (2) to balance the flow through the three tubes. Only feed water to the tallest tube first and restrict the flow to the minimum needed for the desired effect. Repeat for the second and then the third tubes, balancing the flow equally.

NOTE: This may take several attempts to get the desired effect.

When you have the right flow, you are ready to completely bury the pebble pool in your desired location.



As this pump is water cooled, allowing it to run dry may result in the pump burning out, invalidating the warranty.

DO NOT allow the pump to run dry!

