



# HOW TO FIT


Top Fix

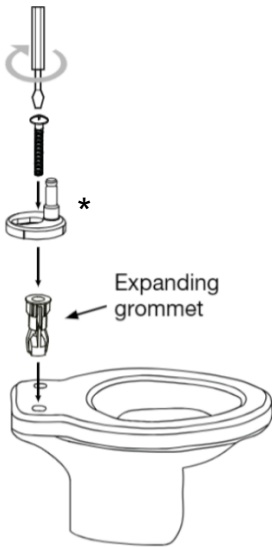

Soft Close Seats

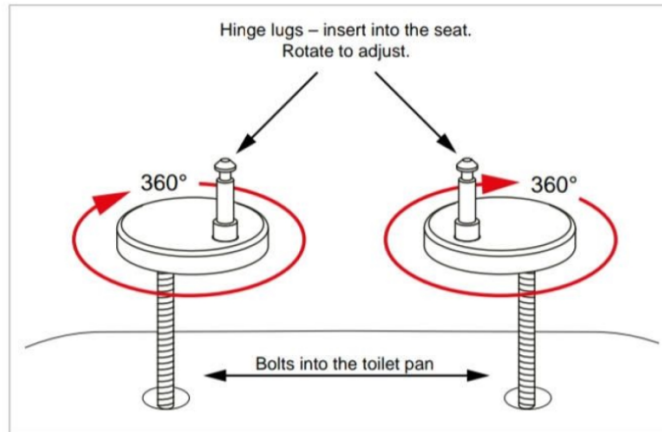

Bottom Fix

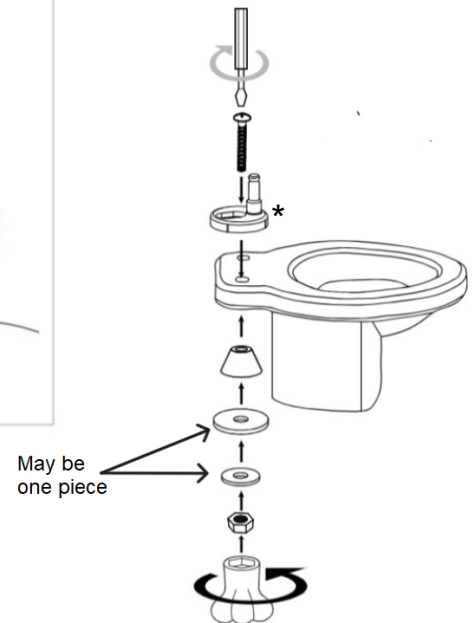

\*Some hinge lugs come with clear jelly inserts that need to be affixed under the lug before assembly

Remove any existing hinge mounts before installation. This seat will only fit on the hinges provided. Most hinge plates are decorative and can be pried off with a screwdriver to expose the screws underneath for removal.

The holes in the seat will not match directly to the holes in the pan. You will rotate the pins inward (see above) once fit to line up with the holes in the seat.

Do not fully tighten screws until the seat has been placed on the pins and aligned with the toilet pan.

The one or two button quick release is only for releasing the seat from the pan. Do not push the button(s) in when fitting

Do not force close your seat or lid, wait for it to naturally close. Forcing close the seat or lid stresses the hinge barrel and will shorten the lifespan of this feature.

Need a video?  
(for most models)

