



Tuff-Tile Diamond


Tuff-Tile Diamond is an interlocking non-slip tile system with a moulded cellular structure designed to provide outstanding comfort and durability. Resistant to most chemicals and solvents, Tuff-tile Diamond also offers total protection to existing floors by reducing damage caused by impact, abrasion, and vibration. For use both indoors and outside, wet and dry environments, the tiles are suitable for fork trucks, pallet trucks, stillages and heavy loads as well as for wheelchairs, pushchairs, and trolleys. The tiles are easy and quick to assemble due to their unique interlocking joint. With an overall height of 14mm, bevel edges are needed to create the ramped edge.

Features


- ◆ **Typical applications:** An extremely hard-wearing mat ideal for use in garages, workshops, warehouses, factories, as temporary floor protection, schools, exhibitions and events, residential areas and sport and leisure facilities.
- ◆ **Material:** 100% recycled PVC.
- ◆ **Cleaning:** Wash with cold water and mild detergent, use vacuum cleaner, or use pressure pump to remove dirt.
- ◆ **Sustainability:** Recyclable material. REACH compliant.
- ◆ **Warranty:** Lifetime.



Black only. Bevels available in both black and yellow

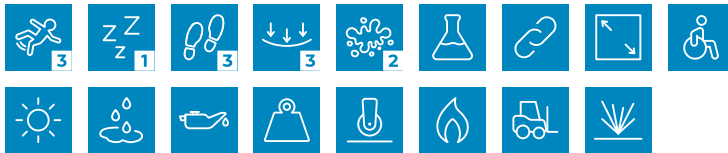

For our icon glossary please visit: bluediamond.uk.com/glossary
For more information about this product or, to place an order [click here](#)

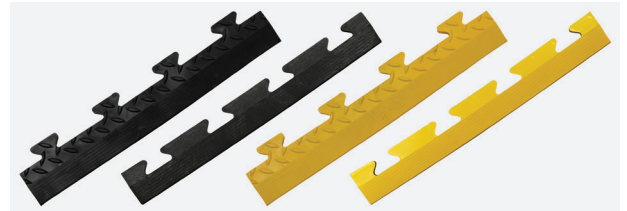

Code	Metric	Imperial	Thickness	Weight	Type	Per	Colour
TTD2020BL	50cm x 50cm	2' x 2'	14mm	1.7kg	Tile	(single)	Black
TTD2020BL4	50cm x 50cm	2' x 2'	14mm	6.8kg	Tile	(pack of 4)	Black
TTD2020BL9	50cm x 50cm	2' x 2'	14mm	15.3kg	Tile	(pack of 9)	Black
TTD20BLF	50cm	2' long	14mm	0.2kg	Bevel - Female	(single)	Black
TTD20BLF4	50cm	2' long	14mm	0.8kg	Bevel - Female	(pack of 4)	Black
TTD20BLM	50cm	2' long	14mm	0.2kg	Bevel - Male	(single)	Black

Our delivery promise

We guarantee your order will be shipped on time, every time.
That's the Blue Diamond difference.

V2.05.23

Get in touch

+44 (0) 1779 841 899
sales@bluediamond.uk.com
www.bluediamond.uk.com

Tuff-Tile Diamond

Code	Metric	Imperial	Thickness	Weight	Type	Per	Colour
TTD20BLM4	50cm	2' long	14mm	0.8kg	Bevel - Male	(pack of 4)	Black
TTD20YLF	50cm	2' long	14mm	0.2kg	Bevel - Female	(single)	Yellow
TTD20YLF4	50cm	2' long	14mm	0.8kg	Bevel - Female	(pack of 4)	Yellow
TTD20YLM	50cm	2' long	14mm	0.2kg	Bevel - Male	(single)	Yellow
TTD20YLM4	50cm	2' long	14mm	0.8kg	Bevel - Male	(pack of 4)	Yellow

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Anti-fatigue:	Good anti-fatigue properties, resistant to level 1
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Crush resistant:	Excellent crush resistance to level 3. Easily regains form
Soil resistant:	The diamond top design removes soil, dirt and grime to level 2
Chemical resistant:	Yes, resistant to most solvents and chemicals
Connectable:	Yes, the mats are modular and interlocking with bevelled edges to create ramps to all sides
Cut to size:	Yes, mat can be cut to bespoke sizes
Disability friendly:	Yes, the mats have ramped edges making them suitable for wheelchair users
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Heavy area:	Yes
Wheeled area:	Yes, suitable for fork trucks, pallet trucks, stillages and heavy loads as well as for wheelchairs, pushchairs, and trolleys
Environment:	Suitable for indoor and outdoor use
Flame retardant:	Yes
Forklifts:	Yes
Impact resistant:	Yes

Tuff-Tile Diamond

Technical Specification

Product testing:	<ul style="list-style-type: none">◆ Flame Retardant – BS EN ISO 9239-1:2010, BS EN ISO - 11925-2:2010, BFL-S1◆ Slip Resistant – BS EN 13036-4: 2011◆ Load Tested – up to 3.35t per tyre
Sustainability:	<ul style="list-style-type: none">◆ 100% recyclable material◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
Cleaning:	Wash with cold water and mild detergent, use vacuum cleaner, or use pressure pump to remove dirt