TRADE PRICE DEALS

4 LEVEL GALVANISED GARAGE SHELVING UNIT



Instruction manual for model numbers:
175A, 175B & 175D

Thank you for buying this shelving unit from Trade Price Deals Ltd.

It is very important that you read and understand these instructions carefully before attempting to assemble your racking. This will ensure the safety of yourself and others during the assembly process, and will ensure that your product is used correctly and safely after assembling.

Please take note of your part number, your universally distributed load (UDL*) per level and the loading diagram on page 7.


PART NUMBER	UDL*	MAX WEIGHT PER UNIT
175A	175KG	700KG
175B	175KG	700KG
175D	175KG	700KG

*UDL is universally distributed load, or the maximum weight allowed per level, distributed evenly across the level.



PARTS LIST

175A, 175B & 175D

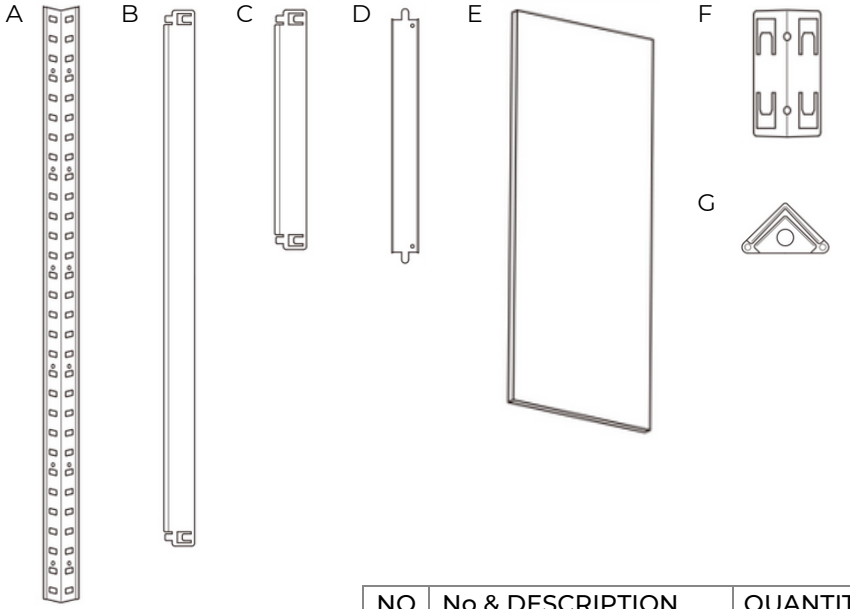

Models 175D will have 8 centre support beams instead of 4.

NO	No & DESCRIPTION	QUANTITY
A	Upright	8
B	Front / Back Beam	8
C	Side Beam	8
D	Centre Support Beam	4
E	MDF Shelf	4
F	Upright Joint	4
G	Plastic Feet	8

ASSEMBLY INSTRUCTIONS


- Always assemble on a firm, level surface. It is not advisable to assemble on a carpeted floor.
- It is recommended that assembly is completed by two people.
- Always wear protective gloves when assembling.
- Use a cloth to protect the powder coating when using the mallet to tap beams into place.
- Always ensure that the tabs on the beams (B & C) fully enter the slots on the uprights (A).
- Never locate the bottom shelf more than 150mm from floor.
- Always locate top shelf at highest possible position.

STEP 1.

Fit plastic foot (G) to bottom of each upright (A).

STEP 2.

Use 2 x side beams (C) to join together 2 x uprights (A).
Locate beams at height that shelves will be required, creating a ‘ladder’.

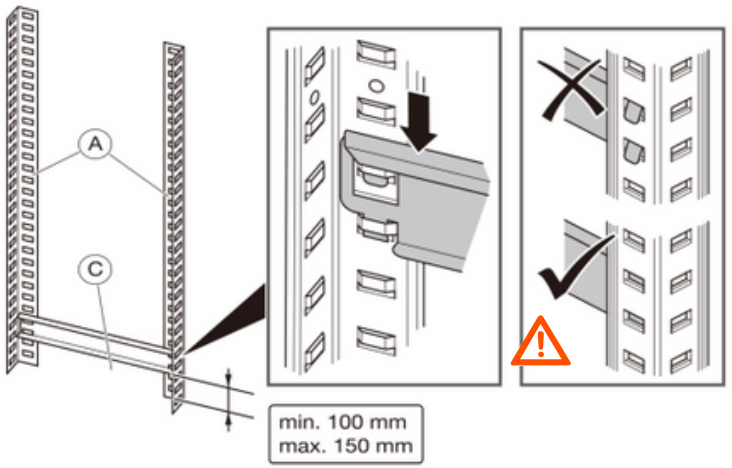


STEP 3.

Repeat to create another ‘ladder’, ensuring corresponding beams are at same height.


STEP 4.

Join the 2 ‘ladders’ together using 4 x front/back beams (B) on one side, matching the height of the side beams.

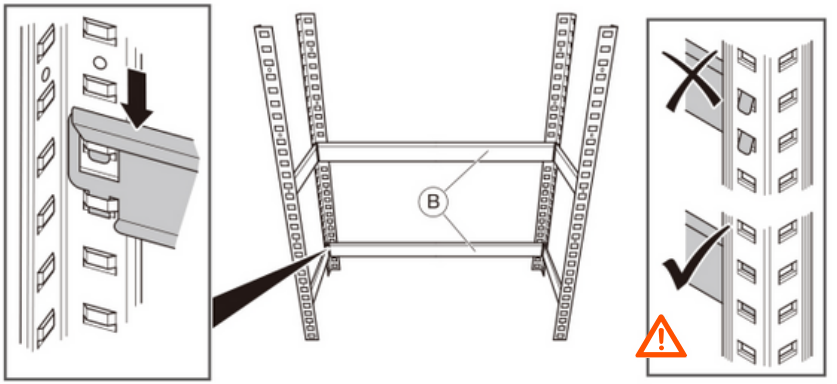


STEP 5.

Using upright joints (F) connect the remaining 4 x uprights (A) to the existing 4 uprights.

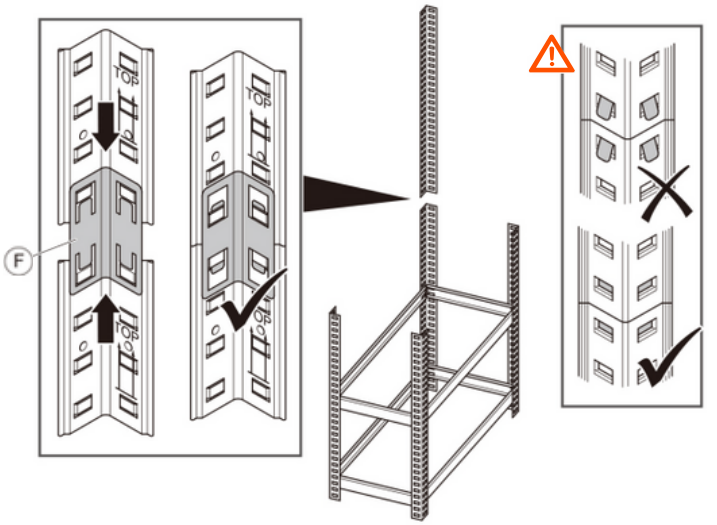


STEP 6.

Repeat steps 2-4 to create the top half of the unit.

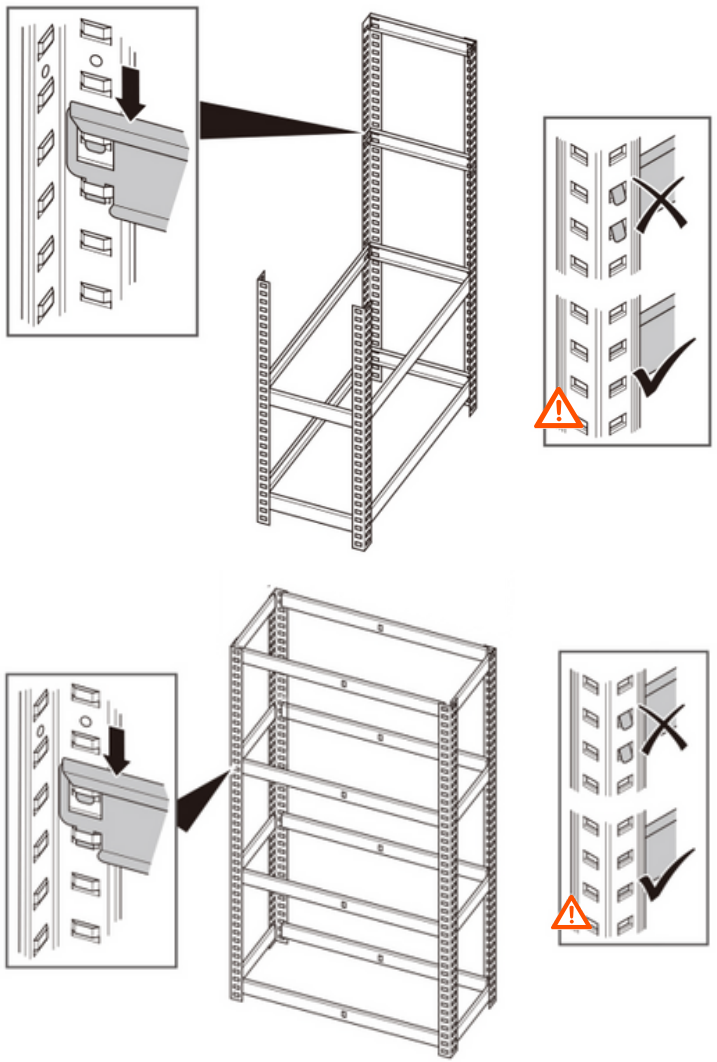

STEP 7.

Connect front/back beams (B) using centre support beams (D).

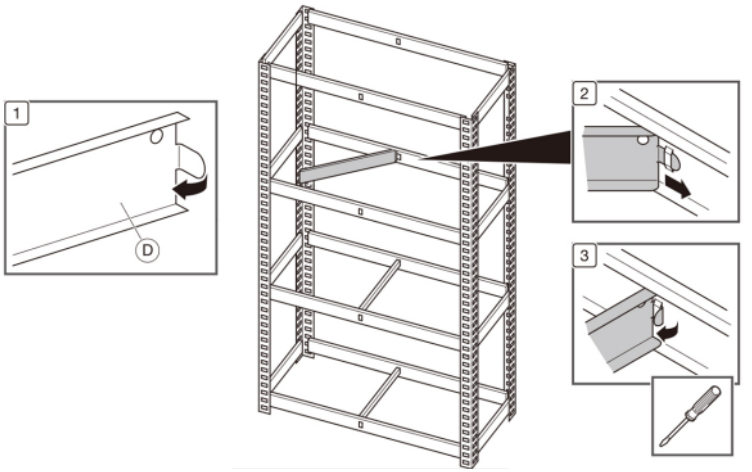


STEP 8.

Bend flexible tabs back on themselves, using flat-head screwdriver, for maximum rigidity.


STEP 9.

Locate MDF shelf level (E) into position, tapping lightly to ensure they sit in recessed beam edges.
Fit remaining plastic feet (G) to top of each upright.

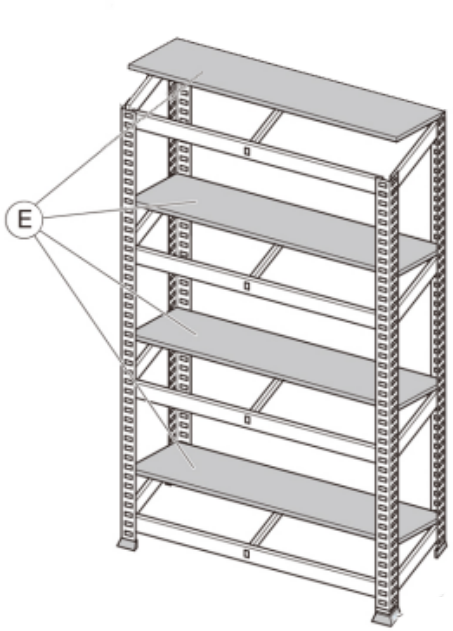

GENERAL SAFETY RULES

1. Ensure shelving is always kept in good condition.
2. Always adhere to the maximum UDL for your shelving, as shown on page 2.
3. If your shelving unit gets damaged stop using immediately.
4. Heavier items should always be stored on the lower shelves. Always load your shelf from the bottom up.
5. Ensure load is evenly distributed as per diagram below.

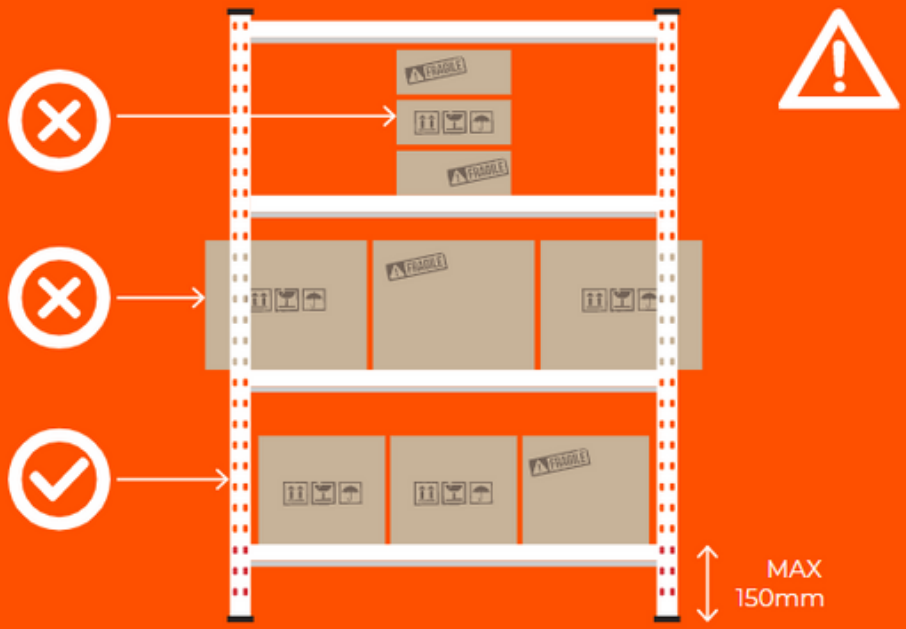

RECYCLING

- Always dispose of packaging responsibly and
- appropriately.
- Cardboard box – widely recycled.
- Plastic sleeve – not widely recycled.