TRADE PRICE DEALS

3 LEVEL EXTRA HEAVY DUTY BOLTLESS SHELVING UNIT



Instruction manual for model numbers:
350FHD, 350GHD, 350HHD & 350JHD

Thank you for buying this shelving unit from Trade Price Deals Ltd.

It is very important that you read and understand these instructions carefully before attempting to assemble your racking. This will ensure the safety of yourself and others during the assembly process, and will ensure that your product is used correctly and safely after assembling.

Please take note of your part number, your universally distributed load (UDL*) per level and the loading diagram on page 7.


PART NUMBER	UDL*	MAX WEIGHT PER UNIT
350FHD	350KG	1050KG
350GHD	350KG	1050KG
350HHD	350KG	1050KG
350JHD	350KG	1050KG

*UDL is universally distributed load, or the maximum weight allowed per level, distributed evenly across the level.



PARTS LIST

350FHD, 350GHD, 350HHD & 350JHD

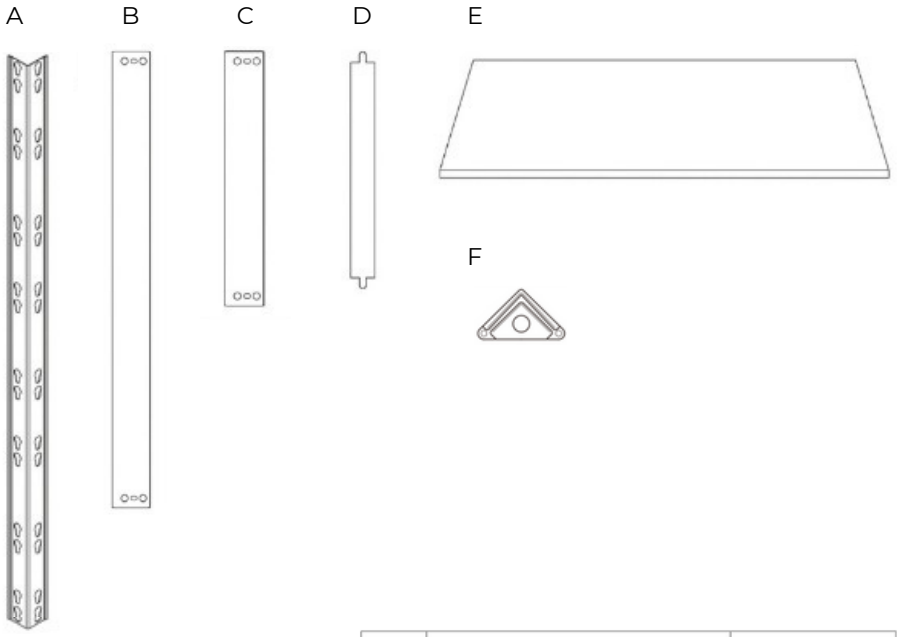

NO	No & DESCRIPTION	QUANTITY
A	Upright	4
B	Front / Back Beam	6
C	Side Beam	6
D	Centre Support Beam	6
E	MDF Shelf	3
F	Plastic Feet	8


Please note: these parts will be delivered in 2 separate boxes.

ASSEMBLY INSTRUCTIONS

- Always assemble on a firm, level surface. It is not advisable to assemble on a carpeted floor.
- It is recommended that assembly is completed by two people.
- Always wear protective gloves when assembling.
- Use a cloth to protect the powder coating when using the mallet to tap beams into place.
- Always ensure that the slots on the beams (B & C) fully enter the keyholes on the uprights (A).
- Never locate the bottom shelf more than 150mm from floor.
- Always locate top shelf at highest possible position.

STEP 1.

Select two uprights (A) and push on plastic feet (F) to bases.
Insert a short side beam (C) into the keyholes at the lowest shelf level required.

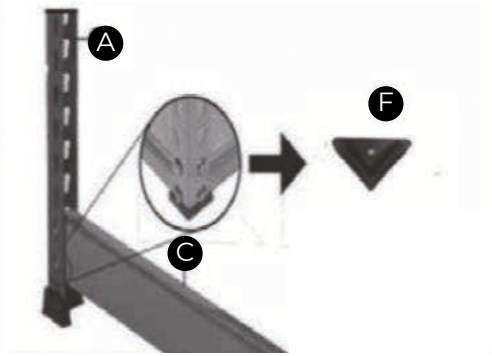


STEP 2.

Tap beam (C) with a rubber mallet to ensure the end studs are fully located in the bottom of the keyholes on both uprights.
Lean the uprights (A) against a wall for support if needed.

STEP 3.

Repeat steps 1 and 2 until you have created a 'ladder style frame'.
TIP: Now is a good time to check the space between the beams suits the items you want to store on the shelves and adjust as required.

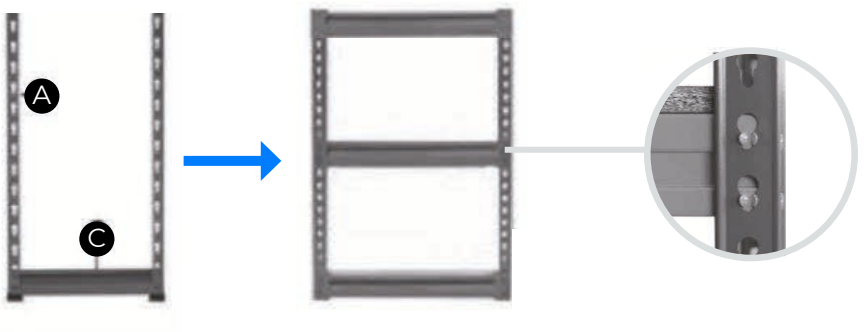


STEP 4.

Select two more uprights (A) and repeat steps 1 and 3 until you have a second 'ladder style frame'.
TIP: Use the first frame as a template to get the correct spacing.


STEP 5.

Take two long beams (B) and insert them into the keyholes on one frame at the same height as the short beams.
Tap into place with a rubber mallet.

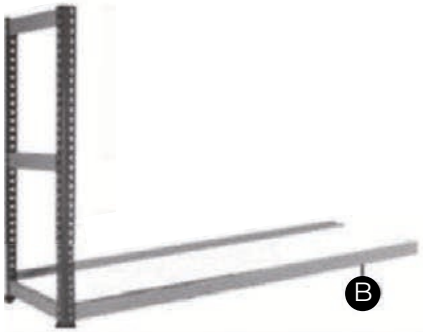

STEP 6.

Insert the other ends of the beams (B) into the second frame as in steps 5.

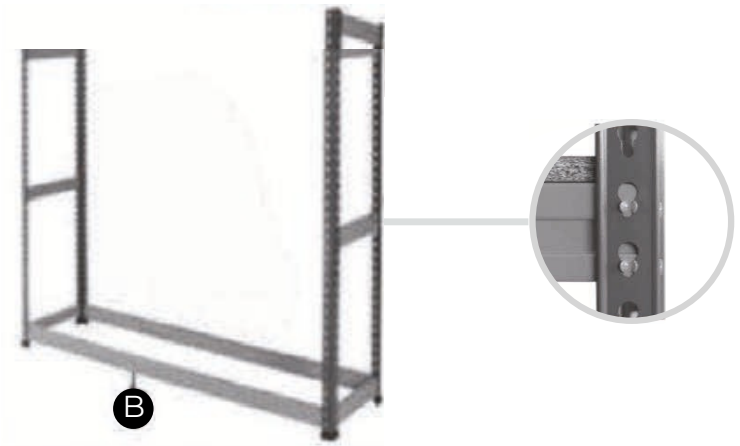


STEP 7.

Repeat steps 5 and 6 to add the remaining long beams. Ensure that each long beam is located at the same height as the side beams



STEP 8.

Locate support beams (D) onto the metal studs on each long beam (B). Tap into place and repeat for all levels.
Bend flexible tabs back on themselves, using flat-head screwdriver, for maximum rigidity.

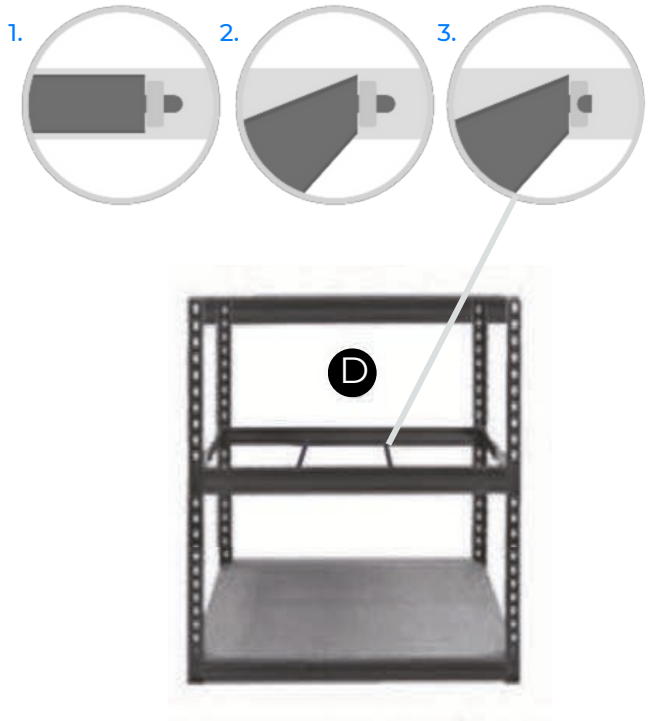


STEP 9.

Insert MDF decks (E) into each level-decks sit on the top of the beams inside.



GENERAL SAFETY RULES

1. Ensure shelving is always kept in good condition.
2. Always adhere to the maximum UDL for your shelving, as shown on page 2.
3. If your shelving unit gets damaged stop using immediately.
4. Heavier items should always be stored on the lower shelves. Always load your shelf from the bottom up.
5. Ensure load is evenly distributed as per diagram below.

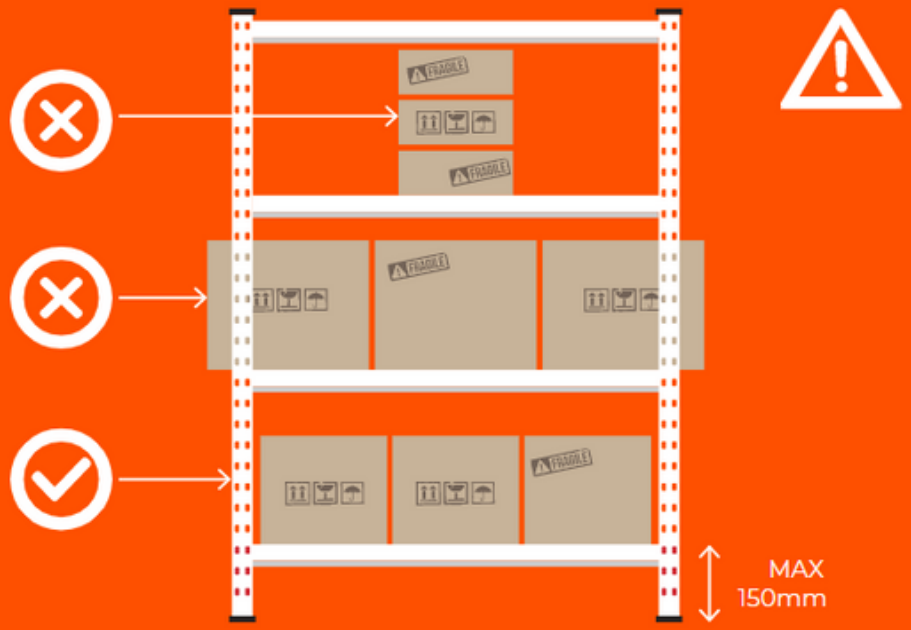

RECYCLING

- Always dispose of packaging responsibly and
- appropriately.
- Cardboard box – widely recycled.
- Plastic sleeve – not widely recycled.