

# ACT2085 - Dual Handle Monobloc

Product Finish: Chrome

EAN13 barcode: 5060344153379



## Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Solid and functional European architect design styling
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting


## Additional information / Parts included:

1 x triangular stabiliser, 1 x 2.0mm allen key, 1 x 2.5mm allen key

## Primary WRAS fittings number (see [www.wras.co.uk](http://www.wras.co.uk)):

2007352

## Product dimensions:

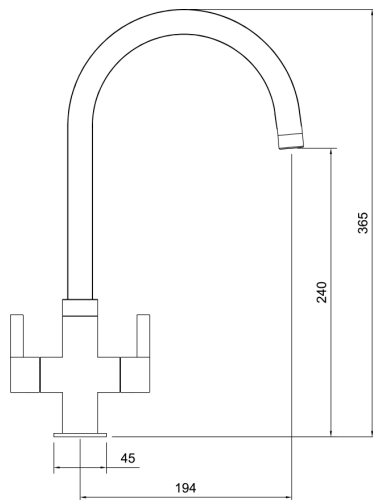


- Overall Height / projection: 365 mm
- Exit reach: 194 mm
- Exit height: 240 mm
- Centre distance(s): n/a
- Base diameter(s): 45 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 50 mm
- Spout diameter: 22 mm
- Spout aerator size: M22 x 1 F

## Packaged properties:

Box length: 425 mm  
Box width: 235 mm  
Tap only weight: 0.96 kg

Box depth: 75 mm  
Units per outer: 5  
Boxed weight: 1.50 kg

## Product flow characteristics:

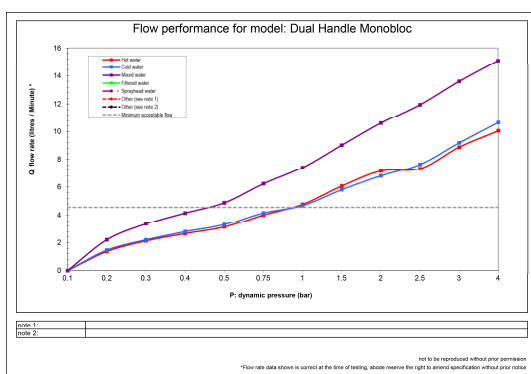

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 13.60

- Control valve type: M20 QT
- Flow characteristics: Single flow
- Non return valve(s): Integral to Hot & Cold inlets

- Aerator type: Honeycomb aerator
- Spout connection method: Locking Collar

- Tail pipe inlet / outlet size: M10 x 1 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 370 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year