

# ACT3012 - Single Lever Quad

Product Finish: Chrome

EAN13 barcode: 5060344159906



## Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Minimalist planate design form
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting


## Additional information / Parts included:

1 x White triangular stabilising bracket - (sco06036) - m8 x 95mm fixing stud, fixing nut, lower gasket, metal horseshoe

## Primary WRAS fittings number (see [www.wras.co.uk](http://www.wras.co.uk)):

2206350

## Product dimensions:

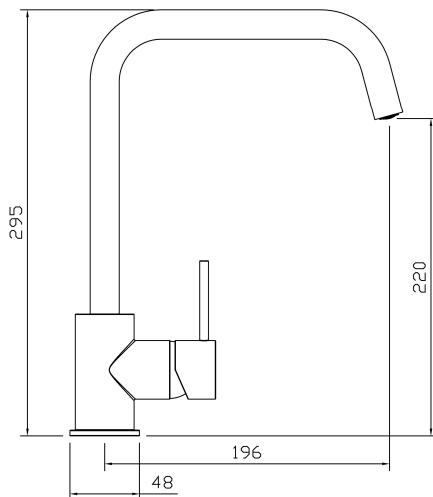


- Overall Height / projection: 295 mm
- Exit reach: 196 mm
- Exit height: 220 mm
- Centre distance(s): n/a
- Base diameter(s): 48 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 50 mm
- Spout diameter: 20 mm
- Spout aerator size: M16 x F

## Packaged properties:

Box length: 420 mm  
Box width: 235 mm  
Tap only weight: 0.89 kg

Box depth: 75 mm  
Units per outer: 5  
Boxed weight: 1.62 kg

## Product flow characteristics:

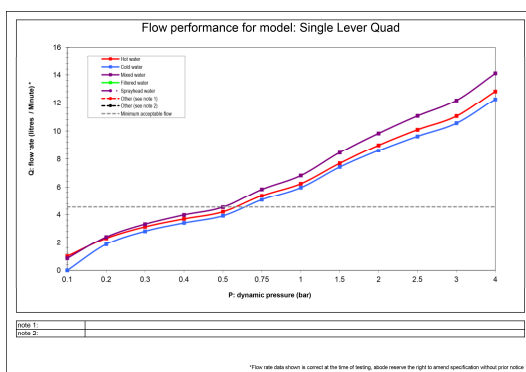

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 12.17
- Control valve type: 35mm Ø single lever ceramic cartridge + square handle spacer
- Flow characteristics: Single flow
- Non return valve(s): Yes, cold supply only
- Aerator type: Honeycomb aerator (Coin slot)
- Spout connection method: Rear of body
- Tail pipe inlet / outlet size: M10 / 1/2" BSP Female (Hot), 1/2" BSP Male (Cold)
- Inlet pipe type / length: Flexible stainless braided hose / 250 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year