

COREFIX[®] TWIST




FEATURES

- Medium duty “no drill” metal plasterboard wall fixing
- No pre-drilling is required, easy to install & remove with just a screwdriver
- Medium Duty Load 16kg
- Removable

APPLICATIONS

- Lighting fixtures
- Bathroom fittings
- Curtains
- Electrical boxes
- Exit signs
- Wall decorations

INSTRUCTIONS

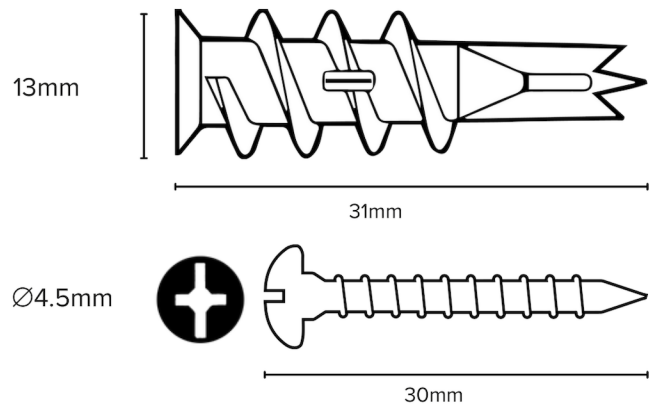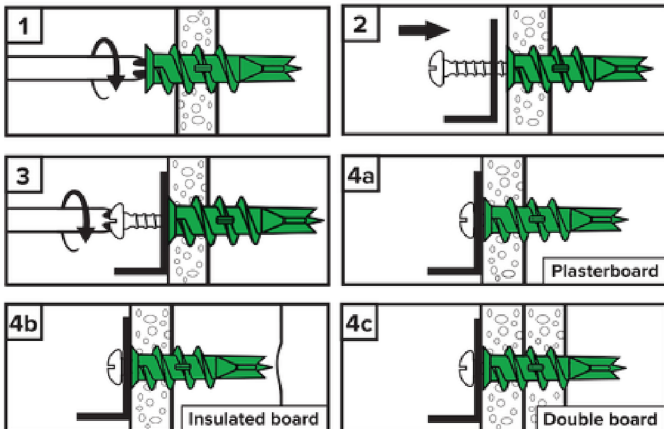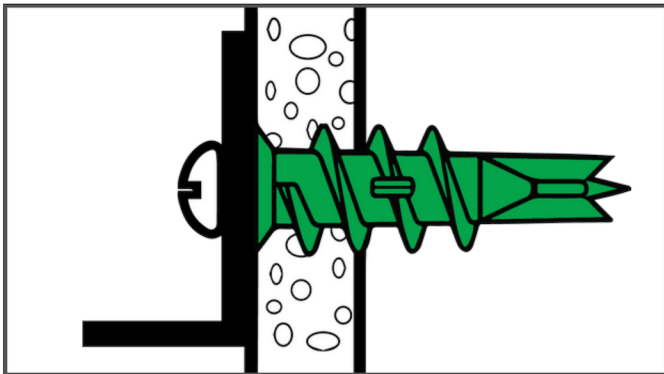

TECHNICAL DATA

Drill diameter	n/a
Min. hole drill depth	n/a
Screw diameter	4.5mm
Screw material	Steel
Fixing length	31mm
Fixing material	Zinc Alloy
Max. fixture thickness	10mm
Safe Working Load - Plasterboard (Shear, single fixing)	16kg

- Always check for cables and pipes before drilling and use suitable PPE.
- Independently tested on plasterboard with blockwork behind.
- Always refer to manufacturer's instructions when installing anything with Corefix and use the recommended number of fixings.

Notes: Factor of safety of 2. Data is for static loadings.