
COREFIX® WALL HOOK

FEATURES

- Universal wall hook for plasterboard and masonry
- Fast & easy to install
- Versatile plug knots behind plasterboard and expands in masonry
- Ideal for medium duty loads
- Supplied with wall hook




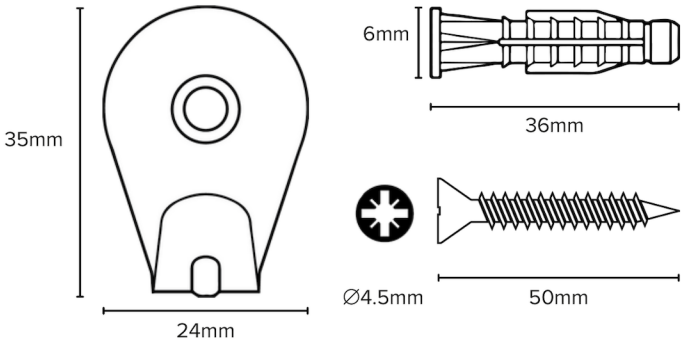

APPLICATIONS

- **Photo frames**
- **Mirrors**
- **Wall decorations**
- **Paintings**

INSTRUCTIONS

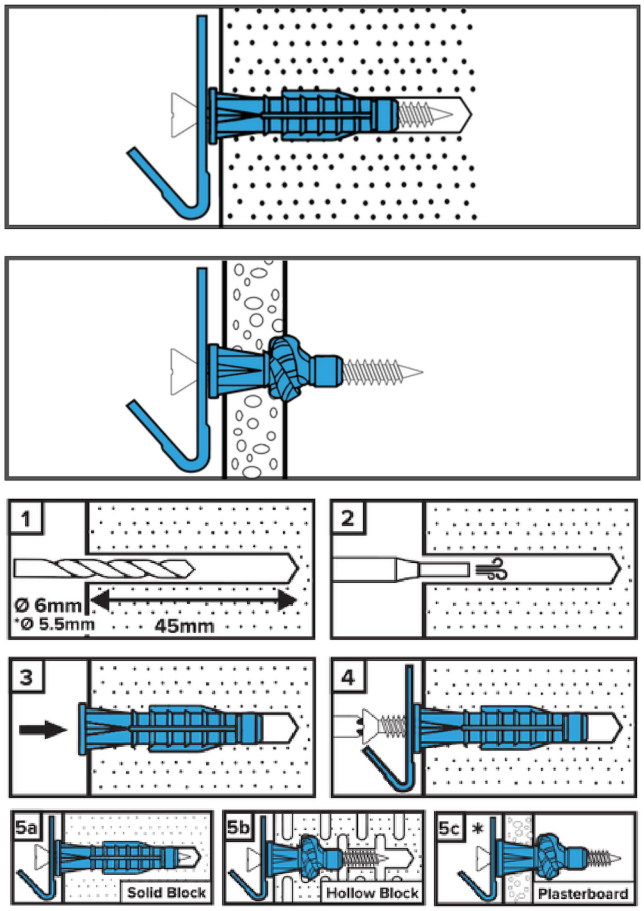

- Always check for cables and pipes before drilling and use suitable PPE.
- Independently tested on plasterboard with blockwork behind.
- Always refer to manufacturer's instructions when installing anything with Corefix and use the recommended number of fixings.

TECHNICAL DATA

Drill diameter (masonry)	6mm
Drill diameter (plasterboard)	5.5mm
Min. hole drill depth	45mm
Screw diameter	4.5mm
Screw material	Steel
Plug length	36mm
Plug material	Plastic
Max. fixture thickness	10mm
Safe Working Load - Concrete (Shear, single fixing)	60kg
Safe Working Load - Plasterboard (Shear, single fixing)	10kg

Notes: Factor of safety of 2. Data is for static loadings.