

ACT3066 - Single Lever Quad

Product Finish: Forrest Green

EAN13 barcode: 5060879992320



Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Minimalist planate design form
- Antisplash spout supplied as standard
- Supplied complete with flexible tail pipes for fast simple fitting


Additional information / Parts included:

1 x White triangular stabilising bracket - (sco06036) - m8 x 95mm fixing stud, fixing nut, lower gasket, metal horseshoe

Primary WRAS fittings number (see www.wras.co.uk):

2206350

Product dimensions:

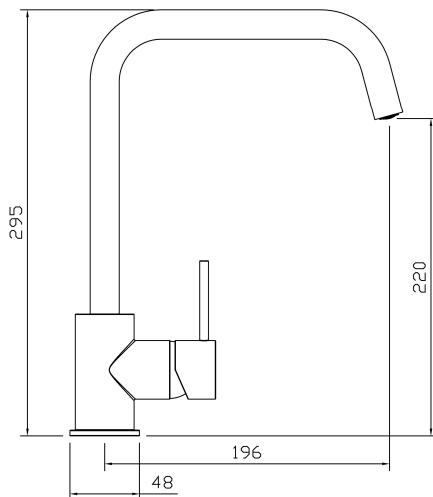


- **Overall Height / projection:** 295 mm
- **Exit reach:** 196 mm
- **Exit height:** 220 mm
- **Centre distance(s):** n/a
- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface depth:** 50 mm
- **Spout diameter:** 20 mm
- **Spout aerator size:** M16 x F

Packaged properties:

Box length: 420 mm
Box width: 235 mm
Tap only weight: 0.89 kg

Box depth: 75 mm
Units per outer: 5
Boxed weight: 1.62 kg

Product flow characteristics:

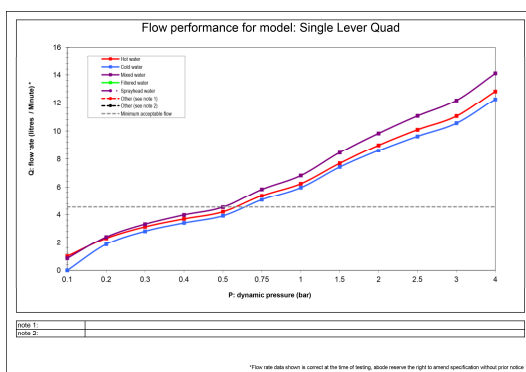

- **Min / Max water pressure:** 0.50 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 12.17
- **Control valve type:** 35mm Ø single lever ceramic cartridge + square handle spacer
- **Flow characteristics:** Single flow
- **Non return valve(s):** Yes, cold supply only
- **Aerator type:** Honeycomb aerator (Coin slot)
- **Spout connection method:** Rear of body
- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Female (Hot), 1/2" BSP Male (Cold)
- **Inlet pipe type / length:** Flexible stainless braided hose / 250 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year