ACT3039 - Single Lever Professional Spray

Product Finish: Brushed Nickel/Matt Black **EAN13 barcode:** 5060879992351

Product features:

- Single lever control for effortless single handed control
- Supplied complete with flexible tail pipes for fast simple fitting
- Minimalist planate design form
- Single spray pattern pull out showerhead
- Black nylon spout hose for stylish durability

Additional information / Parts included:

1 x metal horseshoe, 1 x rubber ring, 1 x fixing stud, 1 x fixing nut, 1 x rubber seal, 1 x triangular stabilser

Primary WRAS fittings number (see www.wras.co.uk):

None

Product dimensions:

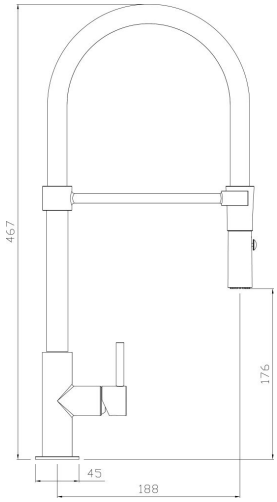

- **Overall Height / projection:** 467 mm
- **Exit reach:** 188 mm
- **Exit height:** 176 mm
- **Centre distance(s):** n/a
- **Base diameter(s):** 45 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface depth:** 50 mm
- **Spout diameter:** 22 mm
- **Spout aerator size:** M21 x F

Packaged properties:

Box length: 575 mm
Box width: 350 mm
Tap only weight: 1.25 kg
Box depth: 80 mm
Units per outer: 5
Boxed weight: 1.78 kg

Product flow characteristics:

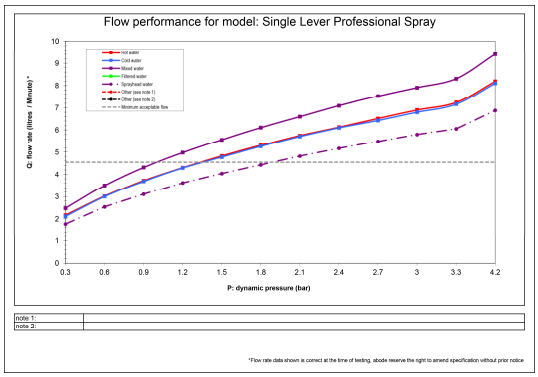

- **Min / Max water pressure:** 1.00 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 6.90

- **Control valve type:** 25mm single lever ceramic cartridge
- **Flow characteristics:** Single flow
- **Non return valve(s):** No

- **Aerator type:** Ø25mm dual jet
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Female
- **Inlet pipe type / length:** flexible stainless braided hose / 365 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

30/06/2023 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted.