

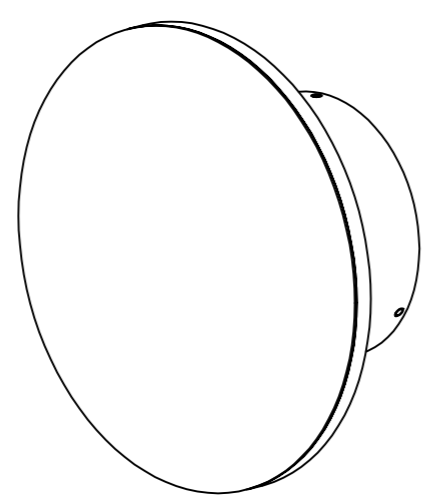






1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON



LWA-431
D180xH67(mm)
LED-6W

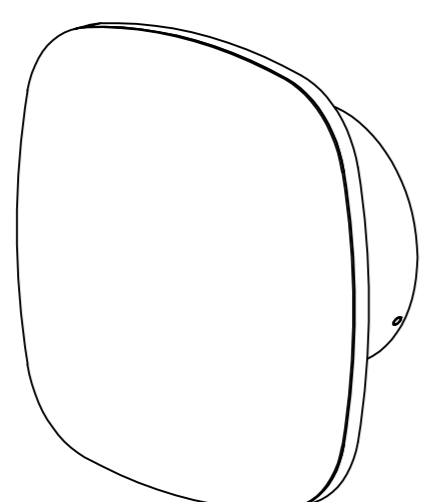

LWA-432
L180xW180xH67(mm)
LED-6W

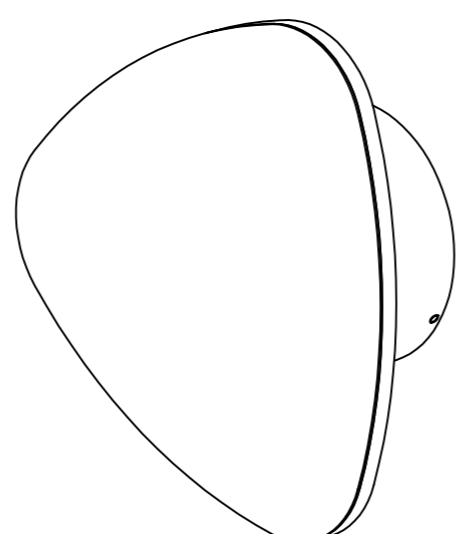

LWA-433
L201xW195xH67(mm)
LED-6W

Lamp : SMD-2835 LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra80
 Input : 100V-240V AC
 Current : Constant 300mA
 Frequency : 50/60Hz
 Watt : 6W
 Life span : 20,000hrs
 Operating temp : -20°C --+40°C
 Indoor use only
 IP65
 Dimmable : NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee