




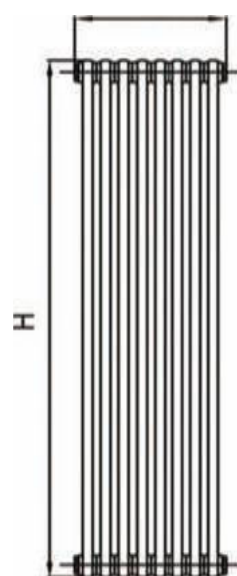


Radiator Name: Traditional Column 4


This product must be fitted only by a fully qualified installer

Front


Description	Illustration	Qty
Radiator		1
Bracket		4
Fixing Screw		4
Air Vent		1
End Plug		1



Front View

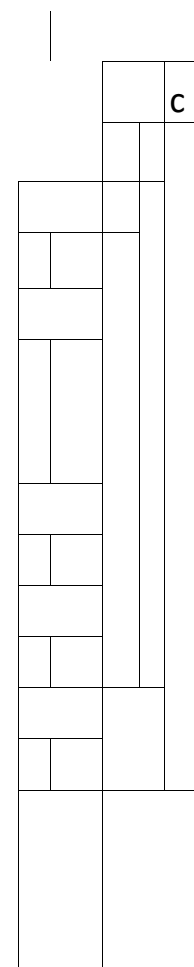

Side View

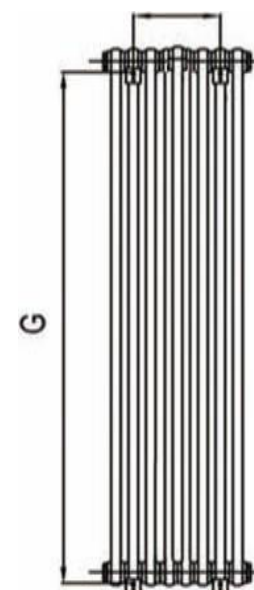

Back View



GENERAL RECOMMENDATION

Before fitting the radiator, it is necessary to wash out the heating system to remove any existing mud, scale, work residues, iraces of flux, oil etc..

When the system water PH is outside the 5,5 • 8.5 range and/or when the dissolved is above 0. 1mg/litre,it is always needed to protect the heating system components(the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water(Silicon rubber tool

In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material

If the system water exceeds 50 degrees Celsius, please install a warning mark near the radiator to avoid any accidental scald. Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemicals against during cleaning

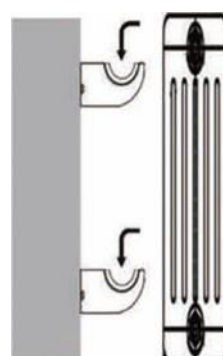

Top view

Product Code	Product Name	pipe number	Height	Width	Thickness	Hanger Axes Horizontal	Wall to front face of the bracket	Hanger Axes	Wall to pipe center distance	Empty Weight	Water volume	
				w		s				c		
			mm	mm	mm	mm	mm	mm	mm	mm		
RV-CS43018	Column 4 300 X 830	18	300	830	140	675	160		95	21.1	14.91	
RV-CS43021	Column 4 300 X 965	21	300	965	140	810	160	220	95	24.6	17.39	
RV-CS43026	Column 4 300 X 1190	26	300	1190	140	1035	160	220	95	30.4	21.54	
RV-CS43030	Column 4 300 X 1370	30	300	1370	140	1215	160	220	95	35.1	24.85	
RV-CS44009	Column 4 400 X 425	9	400	425	140	270	160	320	95	13.0	9.22	
RV-CS44013	Column 4 400 X 605	13	400	605	140	450	160	320	95	18.7	13.32	
RV-CS44018	Column 4 400 X 830	18	400	830	140	675	160	320	95	25.9	18.44	
RV-CS44021	Column 4 400 X 965	21	400	965	140	810	160	320	95	30.2	21.52	
RV-CS44026	Column 4 400 X 1190	26	400	1190	140	1035	160	320	95	37.4	26.64	
RV-CS44030	Column 4 400 X 1370	30	400	1370	140	1215	160	320	95	43.1	30.74	
RV-CS45009	Column 4 500 X 425	9	500	425	140	270	160	420	95	15.6	10.99	
RV-CS45013	Column 4 500 X 605	13	500	605	140	450	160	420	95	22.5	15.87	
RV-CS45018	Column 4 500 X 830	18	500	830	140	675	160	420	95	30.7	21.98	
RV-CS45021	Column 4 500 X 965	21	500	965	140	810	160	420	95	35.8	25.64	
RV-CS45026	Column 4 500 X 1190	26	500	1190	140	1035	160	420	95	44.3	31.75	
RV-CS45030	Column 4 500 X 1370	30	500	1370	140	1215	160	420	95	51.2	36.63	
RV-CS46009	Column 4 600 X 425	9	600	425	140	270	160	520	95	18.0	12.76	
RV-CS46013	Column 4 600 X 605	13	600	605	140	450	160	520	95	25.9	18.43	
RV-CS46018	Column 4 600 X 830	18	600	830	140	675	160	520	95	35.6	25.51	
RV-CS46021	Column 4 600 X 965	21	600	965	140	810	160	520	95	41.4	29.77	
RV-CS46026	Column 4 600 X 1190	26	600	1190	140	1035	160	520	95	51.3	36.85	
RV-CS46030	Column 4 600 X 1370	30	600	1370	140	1215	160	520	95	59.2	42.52	
RV-CS47509	Column 4 750 X 425	9	750	425	140	270	160	670	95	21.6	15.41	
RV-CS47513	Column 4 750 X 605	13	750	605	140	450	160	670	95	31.4	22.26	
RV-CS47518	Column 4 750 X 830	18	750	830	140	675	160	670	95	42.8	30.82	
RV-CS47521	Column 4 750 X 965	21	750	965	140	810	160	670	95	49.8	35.95	
RV-CS47526	Column 4 750 X 1190	26	750	1190	140	1035	160	670	95	61.7	44.51	
RV-CS47530	Column 4 750 X 1370	30	750	1370	140	1215	160	670	95	71.2	51.36	