

Herringbone


Luxury Vinyl Tile

Signature
Collection


...for your perfect flooring.




▲ 09 - Natural Oak

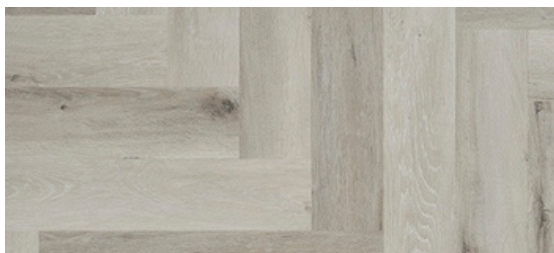


▲ 02 - Bleached Oak

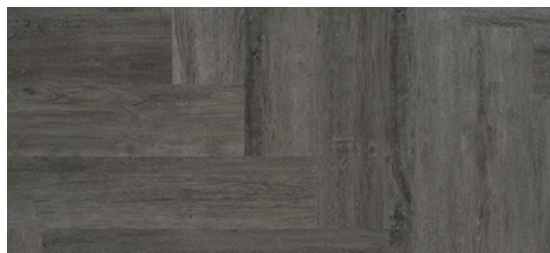


▲ 04 - Charred Oak

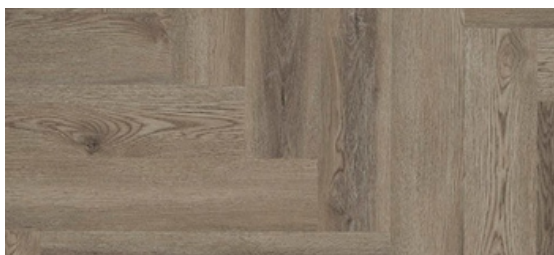


▲ 06 - Smoked Oak

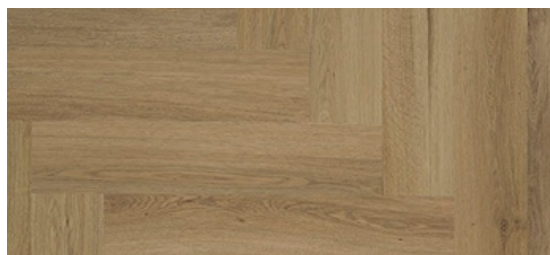

▲ 07 - Classical Oak

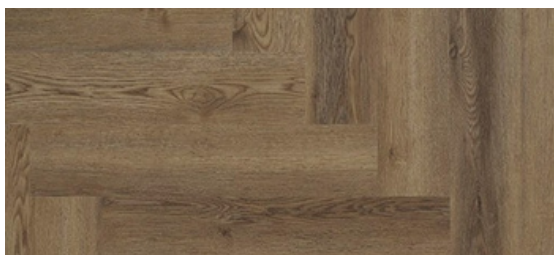

▲ 09 - Natural Oak

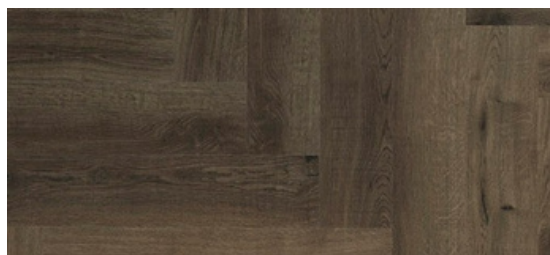

▲ 10 - Country Oak



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk

Rigid Core Click BS/EN Standard

DIMENSIONS

Thickness	EN 429	5.5mm
Length	EN 428	60cm
Width	EN 428	12.50cm
Weight	EN 430	8260 g/m ²
Bevel		4V

TEST

Anti-static Performance	EN 1815	< 2.05kV
Impact Sound Insulation	EN 492-09	ICC=55
Sound Absorption	ISO 717-2	20dB
Thermal Resistance	BS 4745:2005 (2016) ISO 5085-1: 1989	Tog: 0.52
Dynamic Friction	BS EN 13893:2002 (2018)	0.0417m ² K/W
Flammability	BS EN 13501-1:2007 + A1:2009	Bfl - s1
Castor Chair Resistance	EN 12529	Yes Type W
Slip Resistance	DIN 51130	Class R9 DS
Usage Classification	EN 685	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use
Chemical Resistance	EN 423	Not affected
Wear Group	EN 660-1	T
Residual Indentation	EN 433	0.05mm
Light Stability	EN ISO 105-B02	Degree Level ≥ 6 Method A
Dimensional Stability	EN 434	≤ 0.1%
CE Mark	EN14041	EN 14041:2001+AC:2005+AC:2006
Underfloor Heating	EN1264-2	Suitable for underfloor heating. Maximum temperature 27°C

Phthalate Free Our products are manufactured using both phthalate free and biobased plasticisers except for recycled content Yes



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk

Parquet


Luxury Vinyl Tile

Signature
Collection

...for your perfect flooring.




▲ 07 - Classical Oak

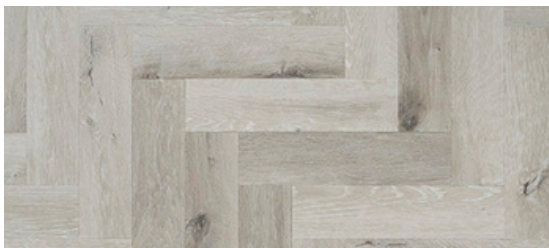


▲ 02 - Bleached Oak




▲ 04 - Charred Oak

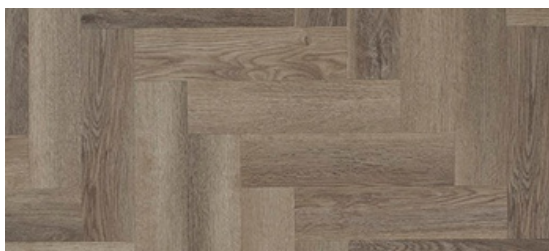


▲ 06 - Smoked Oak

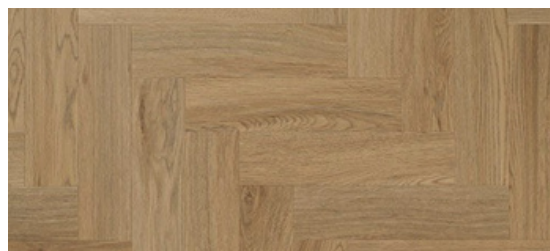

▲ 07 - Classical Oak

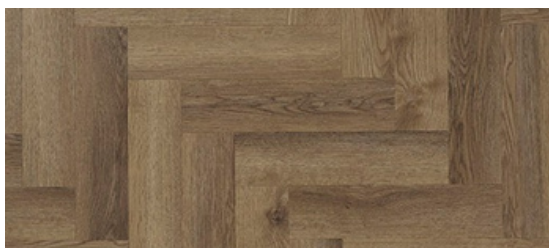

▲ 09 - Natural Oak

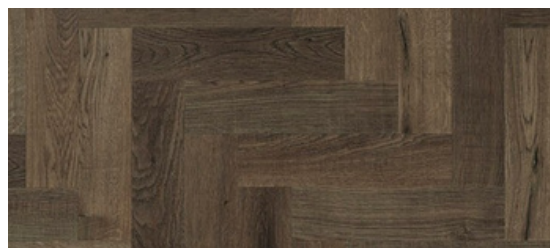

▲ 10 - Country Oak



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk

Glued Down BS/EN Standard

DIMENSIONS

Thickness	EN 429	2.5mm
Length	EN 428	30.48cm
Width	EN 428	7.62cm
Weight	EN 430	4520 g/m ²
Bevel		4V

TEST

Anti-static Performance	EN 1815	< 2.0kV
Impact Sound Insulation	EN 492-09	ICC=63
Sound Absorption	ISO 717-2	5dB
Thermal Resistance	BS 4745:2005 (2016) ISO 5085-1: 1989	Tog: 0.15
Dynamic Friction	BS EN 13893:2002 (2018)	0.0107m ² K/W
Flammability	BS EN 13501-1:2007 + A1:2009	Bfl - s1
Castor Chair Resistance	EN 12529	Yes Type W
Slip Resistance	DIN 51130	Class R10
Usage Classification	EN 685	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use
Chemical Resistance	EN 423	Not affected
Wear Group	EN 660-1	T
Residual Indentation	EN 433	0.05mm
Light Stability	EN ISO 105-B02	Degree Level ≥ 6 Method A
Dimensional Stability	EN 434	≤ 0.12%
CE Mark	EN14041	EN 14041:2001+AC:2005+AC:2006
Underfloor Heating	EN1264-2	Suitable for underfloor heating. Maximum temperature 27°C
Phthalate Free	Our products are manufactured using both phthalate free and biobased plasticisers except for recycled content	Yes



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk


Plank

Luxury Vinyl Tile


Signature
Collection
...for your perfect flooring.




▲ 02 - Bleached Oak

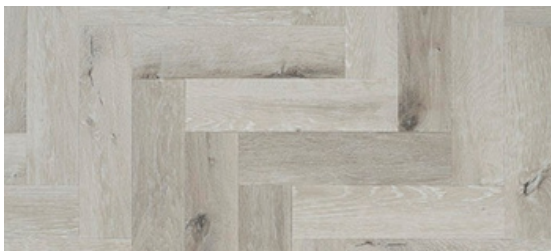


▲ 02 - Bleached Oak

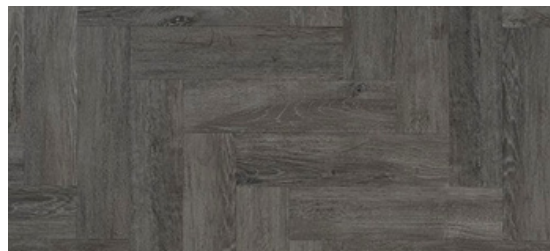


▲ 04 - Charred Oak

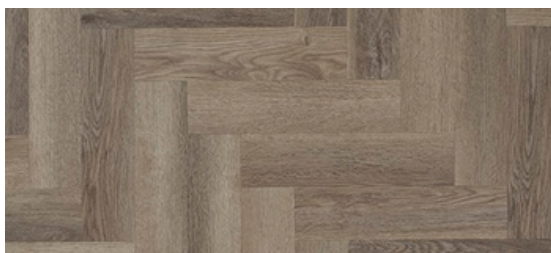


▲ 06 - Smoked Oak

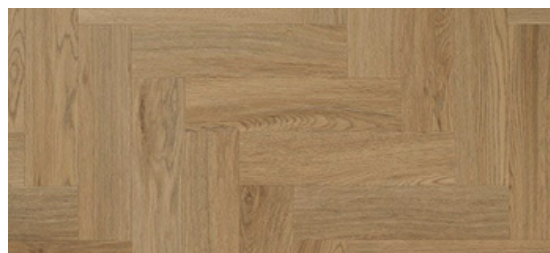

▲ 07 - Classical Oak

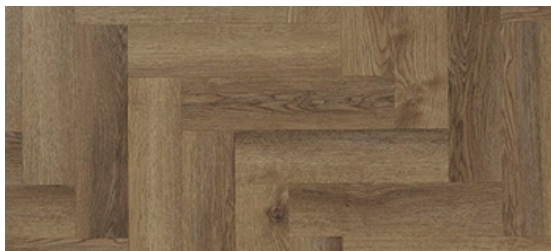

▲ 09 - Natural Oak

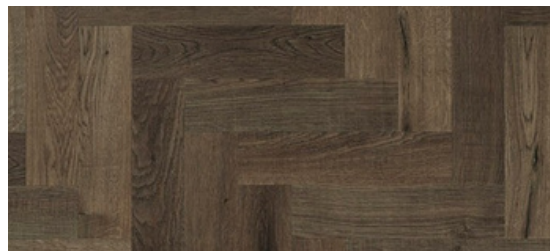

▲ 10 - Country Oak



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk

Glued Down Rigid Core Click BS/EN Standard

DIMENSIONS

Thickness	EN 429	5.5mm	2.5mm
Length	EN 428	121.92cm	121.92cm
Width	EN 428	18.42cm	18.42cm
Weight	EN 430	8100 g/m ²	4630 g/m ²
Bevel		4V	4V

TEST

Anti-static Performance	EN 1815	< 2.05kV	< 2.0kV
Impact Sound Insulation	EN 492-09	IIC=55	ICC=63
Sound Absorption	ISO 717-2	20dB	5dB
Thermal Resistance	BS 4745:2005 (2016) ISO 5085-1: 1989	Tog: 0.52	Tog: 0.15
Dynamic Friction	BS EN 13893:2002 (2018)	0.0417m ² K/W	0.0107m ² K/W
Flammability	BS EN 13501-1:2007 + A1:2009	Bfl - s1	Bfl - s1
Castor Chair Resistance	EN 12529	Yes Type W	Yes Type W
Slip Resistance	DIN 51130	Class R9 DS	Class R10
Usage Classification	EN 685	23 - Heavy Domestic 33 - Heavy Commercial Use 41 - Light Industrial Use	
Chemical Resistance	EN 423	Not affected	
Wear Group	EN 660-1	T	
Residual Indentation	EN 433	0.05mm	
Light Stability	EN ISO 105-B02	Degree Level ≥ 6 Method A	
Dimensional Stability	EN 434	≤ 0.1%	≤ 0.12%
CE Mark	EN14041	EN 14041:2001+AC:2005+AC:2006	
Underfloor Heating	EN1264-2	Suitable for underfloor heating. Maximum temperature 27°C	

Phthalate Free Our products are manufactured using both phthalate free and biobased plasticisers except for recycled content Yes



SCAN QR CODE
TO VISIT OUR
WEBSITE

01342 885385

sales@signatureme.co.uk