



Pure

Super High Density Underlay

Pure - Super High Density Underlay

Only the purest, highest-grade foam is used in the production of the Pure range for the most sumptuous feel under the carpet.


Technical Data

Properties	Unit / Value / Method	
	Pure SHD 9mm	Pure SHD 11mm
Rating / Classification	Heavy / Luxury Use	Heavy / Luxury Use
Density	100kg/m ³ ± 5%	100kg/m ³ ± 5%
Thickness	9mm ± 5%	11mm ± 5%
Roll Dimensions	1.37m x 11m (15.07m ²)	1.37m x 11m (15.07m ²)
Roll Weight	14.5kg ± 5%	17.0kg ± 5%
Tog Rating	2.43 BS 4745:2005	3.04 BS 4745:2005
Impact Sound Reduction	Approx. 38dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010	Approx. 44dB BS EN ISO 717-2:2013 BS EN ISO 10140-3:2010
Flammability (hot metal nut test)	Pass - Medium radius of effect BS 4790:1987 (2009)	Pass - Medium radius of effect BS 4790:1987 (2009)
Guarantee	Lifetime to carpet	Lifetime to carpet


The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.

Heavy
Traffic

Carpet



Best for

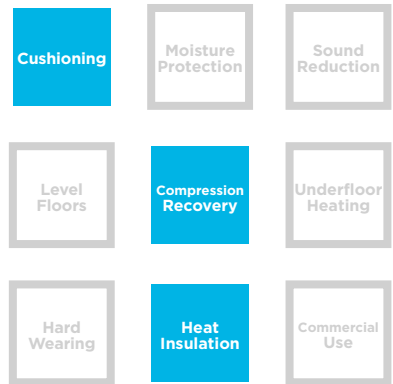

*Suitable for hotels and public buildings

Available in

Code	GAU-PUR-03
Size	1.37m x 11m
Thickness	9mm
Code	GAU-PUR-04
Size	1.37m x 11m
Thickness	11mm