

# Moderno 3010

## Side tap

Filtered cold & steaming hot water side taps - FHC3010

**FEATURES:**

- Hot and cold water tap - dispenses near-boiling water and cold drinking water
- For use with an InSinkErator instant hot water tank and filtration system
- Self-closing hot valve for automatic shut off
- Handles move forward to avoid hitting backsplash
- Spout swivels 360° for convenience

**MATERIAL:**

- Reverse osmosis certified and compatible per NSF/ANSI 58
- Solid brass construction
- Corrosion resistant ceramic disc valve

**FINISHES:**

Chrome | Brushed Steel | Velvet Black | Polished Nickel

**WARRANTY:**

5-Year In-Home Limited Warranty.  
Covers parts and labor.

The complete InSinkErator warranty is included in the Care & Use booklet with each unit.

**CERTIFICATIONS:**

NSF/ANSI 372 • NSF/ANSI 58 • NSF/ANSI 42/53  
NSF/ANSI 61 • ASME A112.18.1 • UPC Certified  
ASSE 1023 • ADA Compliant




**Energy efficient**

An InSinkErator® steaming hot water tap uses less energy than a 40-watt light bulb.



Supply Connection	1/4" (0.64 cm) Compression and/or push fitting
Required Sink Hole Diameter	1-3/8" - 1-1/2" (3.49 cm - 3.81 cm) Standard Sink Hole
Required Supply Pressure	25-125 psi (172-862 kPA or 1.7-8.6 bar)
Backsplash Clearance for Installation	Minimum 2" (5.08 cm) required from sink hole center to backsplash
Counter Thickness	Maximum of 3" (7.62 cm)
Shipping Weight	4.3 lb (1.95 kg)

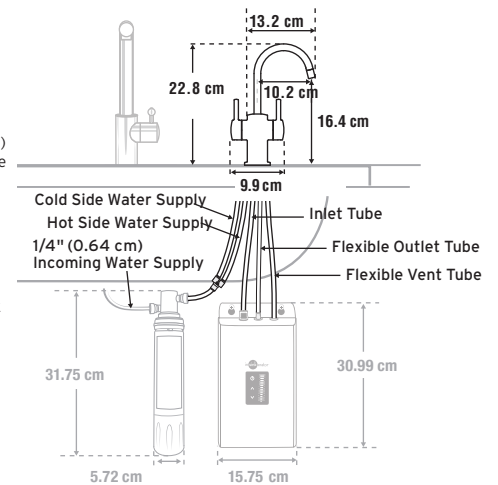

InSinkErator, Suite 10, Building 6, Hatters Lane, Croxley Park, Watford, Herts WD18 8YH. United Kingdom

Sales tel: 01923 297 880  
Service tel: 0800 389 3715  
insinkerator.co.uk

InSinkErator® may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models. © 2022 InSinkErator®. All Rights Reserved.

